


3-2-3 % Accuracy – 1½"-2"-2½"-3½" Dial Sizes

An inexpensive utility pressure gauge for the broad commercial and industrial market. These gauges provide 3-2-3% accuracy for measuring water, oil, gas, or any medium not corrosive to brass or phosphor bronze.

FEATURES

- Soft Soldered Phosphor Bronze Bourdon Tube and brass socket.
- Black finish steel case, plastic face
- Dual scale ranges in both psi and kPa
- 1/8 NPT available on 1½" dial size
1/4 NPT available on 2", 2½" and 3½" dial sizes
- Bottom or back connections available on 1½", 2" and 2½" dial sizes
3½" dial size available with bottom connection only

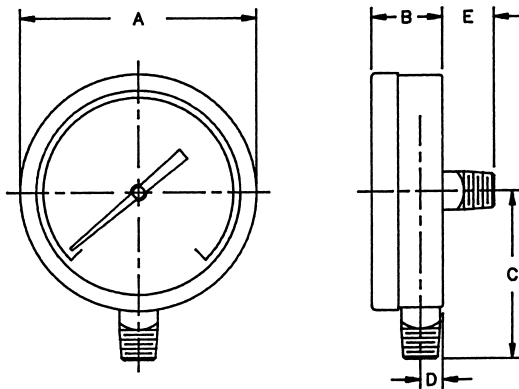

GAUGE SIZE		A	B	C	D	E
1½	INCH	1½	1⅞	1¼	¾	⅝
	MM	41	24	32	6	16
2	INCH	2⅞	1	1⅞	⅞	7⅞
	MM	52	26	48	10	22
2½	INCH	2½	1¼	2½	⅞	1⅜
	MM	64	32	54	10	21
3½ ^②	INCH	3½	1⅞	2¼	⅞	—
	MM	89	30	70	10	—

NOTE: ALL DIMENSIONS ARE APPROXIMATE



UA35A4L



UA25N4L



UA20B4L



UA15A8C



UA20B4C

DIAL SIZE	CATALOG NUMBERS						
	1½"		2"		2½"		3½"
CONNECTION LOCATION	BACK	BOTTOM	BACK	BOTTOM	BACK	BOTTOM	BOTTOM
CONNECTION NPT	1/8	1/8	1/4	1/4	1/4	1/4	1/4
RANGE (psi and kPa)							
30"/0" VAC and 100-0 kPa	—	—	UA20H4C	UA20H4C	UA25H4C	UA25H4L	UA35H4L
30"-0-30 psi and 100-0-200 kPa	—	—	UA20J4C	UA20J4L	UA25J4C	UA25J4L	UA35J4L
30"-0-60" psi and 100-0-400 kPa	—	—	UA20K4C	UA20K4L	UA25K4C	UA25K4L	UA35K4L
30"-0-150 psi and 100-0-1000 kPa	—	—	—	—	UA25L4C	UA25L4L	UA35L4L
30"-0-300 psi and 100-0-2000 kPa	—	—	—	—	UA25M4C	UA25M4L	UA35M4L
0-15 psi and 0-100 kPa	UA15N8C	UA15N8L	UA20N4C	UA20N4L	UA25N4C	UA25N4L	UA35N4L
0-30 psi and 0-200 kPa	UA15A8C	UA15A8L	UA20A4C	UA20A4L	UA25A4C	UA25A4L	UA35A4L
0-60 psi and 0-400 kPa	UA15B8C	UA15B8L	UA20B4C	UA20B4L	UA25B4C	UA25B4L	UA35B4L
0-100 psi and 0-700 kPa	UA15C8C	UA15C8L	UA20C4C	UA20C4L	UA25C4C	UA25C4L	UA35C4L
0-160 psi and 0-1100 kPa	UA15D8C	UA15D8L	UA20D4C	UA20D4L	UA25D4C	UA25D4L	UA35D4L
0-200 psi and 0-1400 kPa	UA15E8C	UA15E8L	UA20E4C	UA20E4L	UA25E4C	UA25E4L	UA35E4L
0-300 psi and 0-2100 kPa	—	—	UA20F4C	UA20F4L	UA25F4C	UA25F4L	UA35F4L
0-600 psi and 0-4200 kPa	—	—	UA20G4C	UA20G4L	UA25G4C	UA25G4L	UA35G4L

TO ORDER: SPECIFY 7 DIGIT "CATALOG NUMBER" FROM ABOVE TABLE.